
SHORT AND LONG TERM REFRIGERATION RENTAL

Model: DT8120 & DT820P

Electric-powered- No fumes, fuel or diesel engine noise.

Pre-assembled and ready to operate. Just make an electrical connection.

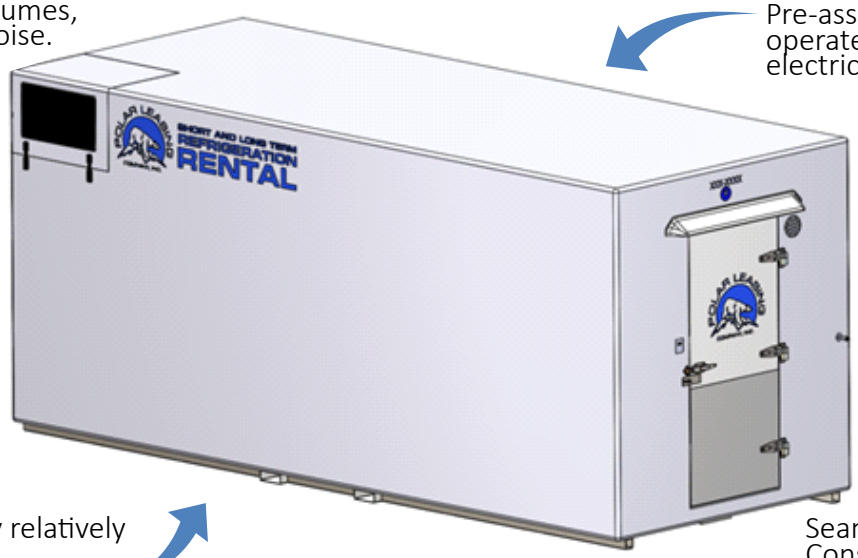


Can be placed on any relatively even surface.

Seamless Fiberglass Construction is immune to heat, cold, and bad weather.


Approvals:	• NSF 7 Listed For Cleanability • UL Listed Electrical and Refrigeration Components • Manufactured in an ISO-9001 Certified Factory
Insulation:	• Polyisocyanurate Foam: 4” Thick X 2.0 PCF Nominal Density (R-28)
Fiberglass:	• 100 mil Thick FRP Composite – exterior • 80 mil Thick FRP Composite – interior
Exterior Finish:	• Seamless Fiberglass • 2 Part Epoxy Paint
Interior Finish:	• Non-skid Floor Finish & Rounded Corners – 29 Grade Sand Aggregate • Anti-microbial Gelcoat
Additional Features:	• Heavy Duty Non-skid Floor • Lockable Door Latch • Hasp Lock (ext. door) • Safety Release Handle • Magnetic Gasket • Sweep Seal • Vinyl Swing Doors • Galvanized Frame • Defrost Timer • Heated Door Jamb • Heated Relief Port • Exterior Temperature Display • Rain Cap Exterior Doors • Interior Lighting • Crowned Roof • Stainless Steel Kick Plate • Forklift Capable frame • Electrical Disconnect Switch • Performance Validation Report
Optional Features:	• Diamond tread ramp
Specs:	• Installed Over-current Protection • Floor Strength: 900 lb/ft^2 • Forklift Slots: 3” x 8” Steel Tubes, 37” Apart on Center

Box Layout


DT820 Plan View

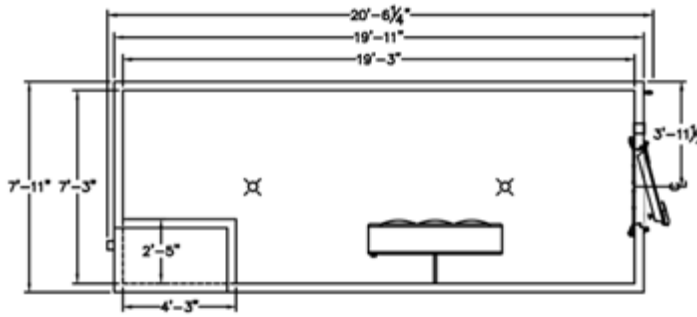


DT820P Plan View

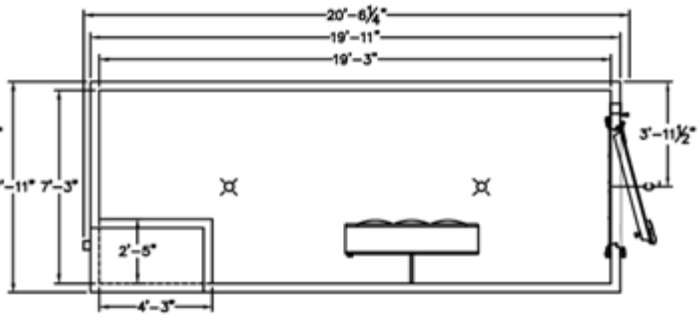


DT820/P Rear Elevation View



DT820 Front Elevation View

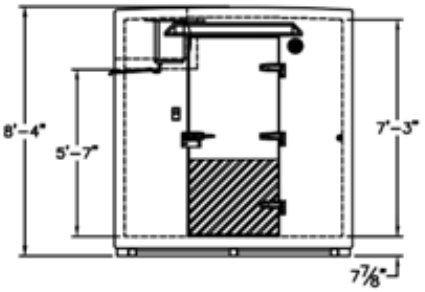

DT820P Front Elevation View

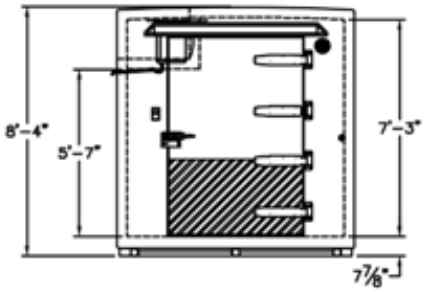

Specifications

Model	DT820 / DT820P
Exterior Width	7'-11" +/- 1”
Exterior Length	19'-11" +/- 1”
Exterior Height	8'-4" +/- 1”
Interior Width	7'-3" +/- 1”
Interior Length	19'-3" +/- 1"
Interior Height	7'-3" +/- 1”
Interior Area	140 ft^2
Interior Volume	1,050 ft^3
LED Lights	2
Condensing Unit	FFAL-022Z-CFV
Horsepower	2-1/4
Coil	RU6E-142
Temperature	-10°F to 35°F / -23°C to 2°C
Refrigerant	R-404a
Electrical Supply	208V or 240V, & 120V (Provide 4 wires: L1, L2, Neutral, Ground)
Phase	1PH, 60Hz
Ampacity Required	Wires capable of 27.0 A
35°F Capacity	24,200 BTU/Hr @ 90°F
-10°F Capacity	10,010 BTU/Hr @ 90°F
Door Opening	33 1/4" x 78 1/2" (standard) 51 1/4“ x 78 1/2" (pallet door)
Empty Weight	4200 lb.